

Work Order ID 140767***140767***

Page 1

Monday, January 18, 2016 10:04:14 AM

Item ID: D6101-005 Accept ***N900040100*** Setup Start ***NS1***
Revision ID: Stop ***NS2***
Item Name: Saddle Billet
Start Date: 1/18/2016 Start Qty: 20.00 ***20*** Cust Item ID:
Required Date: 1/18/2016 Req'd Qty: 20.00 ***20*** Customer:
Reference:

Approvals: Process Plan: MLS Date: JAN 18 2016 Tooling: _____ Date: _____ Run Start ***NR1***
QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
--------------------------------	--------------------------	----------------------	---------	--------	--------------	---------------	---------------	------------------	----------------

Draw Nbr	Revision Nbr
----------	--------------

D6101	Rev B
-------	-------

100	PURCHASING	0.00				DAS 13 9-89	JAN 19 2016	20
-----	------------	------	--	--	--	--	-------------	----

100

Purchasing

Memo

0.00

Purchasing

Issue P/O: 31052

- a) Description: Aluminum billet
- b) 5.00" x 8.250" x 2.50" thick
- c) Tolerance on all dimensions are +0.030"/-0.000"
- d) Grain direction along 5.00" length
- e) Material: 7075-T7351 (QQ-A-250/12)
- f) Material certification required

110	Receive & Inspect for Damage & Mat'l Certs	0.00						
-----	--	------	--	--	--	--	--	--

110

Packaging

Memo

0.01

Packaging

Ensure material certification is attached

20x SP/6-02-03

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :				MRB (QSI042) Approval Completed By Lead hand / Supervisor Approval Verification QC / QA Coordinator Approval	
Description Work Order Deviation				Disposition					
Root Cause		FAULT CATEGORY							
Environment ☐	☐ No Re-verification	☐ Pressure/Forced	☐ Temperature/Cure	☐ Power Loss/Surge	☐ Positioned Wrong				
Design ☐	☐ Operator	☐ Bending	☐ Set-up	☐ Folio/Program	☐ Outside Dimensions				
Doc/Data ☐	☐ Offset/Setup	☐ Centre Not Concentric	☐ BOM/Route	☐ Grain	☐ Over/Under tolerance				
Equip/Tooling ☐	☐ Supplier	☐ Cracks	☐ Broken/Damage/Defect	☐ Weld	☐ Part Incorrect				
Handling/Pre ☐	☐ Training	☐ Crimp/Kink/Ripple/Wave	☐ Inspection Incomplete/Unqualified	☐ Wrong Stock Pulled	☐ Part Lost/Missing				
Material ☐	☐ Use for Testing	☐ Cuffs	☐ Contamination	☐ Out of Sequence	☐ Part Moved				
Internal Transport ☐	☐ Poor Information	☐ Crushing	☐ Countersink	☐ Off-set	☐ Drawing				
Tribal Knowledge ☐	☐ Rushing	☐ Heat Treat	☐ Cut Too Short	☐ Mislabeled	☐ Finish				
LOA ☐	☐ Product Improvement	☐ Wave/Twist in Tube	☐ Instructions Incomplete/Unclear	☐ Fit/Function	☐ Misread				
Substation ☐	☐ Process Improvement	☐ Marks/Chatter	☐ Drill Holes	☐ Misaligned/off center	☐ Turning Sequence				
Past Expiry Date ☐	☐ Manufacturing Process	OTHER :							
Misidentified ☐	☐ Past Due								

Monday, January 18, 2016 10:04:17 AM

Page 1

140767

D6101-005

Required Date: 1/18/2016

Required Qty: 20.00

Comments: IPP A: 01.05.04New IssueEC

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D6101-005P		Purchased	No			110	Each	0.0000	1	20			
D6101-005P									**	20x SP16-02-03			
7075-T7351 8.25X5.0X2.5													

DQA: _____ Date: _____




WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐																																																													
Date :		Step #:		QTY Effective :			MRB (QSI042) Approval																																																										
Description Work Order Deviation				Disposition				Completed By Lead hand / Supervisor Approval Verification QC / QA Coordinator Approval																																																									
Root Cause		FAULT CATEGORY																																																															
Environment ☐	No Re-verification ☐	Pressure/Forced ☐	Temperature/Cure ☐	Power Loss/Surge ☐	Positioned Wrong ☐	Design ☐	Operator ☐	Bending ☐	Set-up ☐	Folio/Program ☐	Outside Dimensions ☐	Doc/Data ☐	Offset/Setup ☐	Centre Not Concentric ☐	BOM/Route ☐	Grain ☐	Over/Under tolerance ☐	Equip/Tooling ☐	Supplier ☐	Cracks ☐	Broken/Damage/Defect ☐	Weld ☐	Part Incorrect ☐	Handling/Pre ☐	Training ☐	Crimp/Kink/Ripple/Wave ☐	Inspection Incomplete/Unqualified ☐	Wrong Stock Pulled ☐	Part Lost/Missing ☐	Material ☐	Use for Testing ☐	Cuffs ☐	Contamination ☐	Out of Sequence ☐	Part Moved ☐	Internal Transport ☐	Poor Information ☐	Crushing ☐	Countersink ☐	Off-set ☐	Drawing ☐	Tribal Knowledge ☐	Rushing ☐	Heat Treat ☐	Cut Too Short ☐	Mislabeled ☐	Finish ☐	LOA ☐	Product Improvement ☐	Wave/Twist in Tube ☐	Instructions Incomplete/Unclear ☐	Fit/Function ☐	Misread ☐	Substation ☐	Process Improvement ☐	Marks/Chatter ☐	Drill Holes ☐	Misaligned/off center ☐	Turning Sequence ☐	Past Expiry Date ☐	Manufacturing Process ☐	OTHER : _____			
Misidentified ☐	Past Due ☐																																																																

SPECIFICATION CONTROL DRAWING

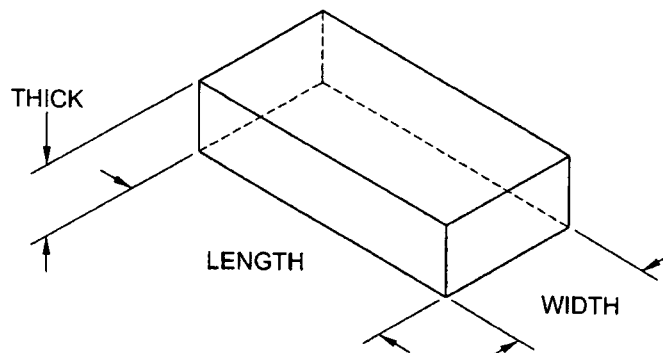

PURCHASE MATERIAL ACCORDING TO THE FOLLOWING TABLE. SPECIFY ALLOY, LENGTH x WIDTH x THICK (+0.030/-0.000), AND GRAIN DIRECTION AS SHOWN.

TOLERANCES ON ALL DIMENSIONS ARE +0.030/-0.000.

ALL DIMENSIONS ARE IN INCHES.

B ACCEPTABLE SPECIFICATIONS FOR 7075-T7351 ALUMINUM ARE AMS-QQ-A-250/12, QQ-A-250/12, OR ASTM B209

Part No.	Alloy	Length	Width	Thick	Grain Direction
D6101-001	7075-T7351 (QQ-A-250/12)	6.000	6.250	2.000	Along 6.000 Length
D6101-003	7075-T7351 (QQ-A-250/12)	7.875	6.250	2.000	Along 7.875 Length
D6101-005	7075-T7351 (QQ-A-250/12)	5.000	8.250	2.500	Along 5.000 Length
D6101-007	7075-T7351 (QQ-A-250/12)	7.750	8.250	2.500	Along 7.750 Length
D6101-009	7075-T7351 (QQ-A-250/12)	8.700	8.250	2.500	Along 8.700 Length
D6101-011	7075-T7351 (QQ-A-250/12)	9.700	8.250	2.500	Along 9.700 Length
D6101-013	7075-T7351 (QQ-A-250/12)	10.100	8.250	2.500	Along 10.10 Length
D6101-015	7075-T7351 (QQ-A-250/12)	9.450	6.250	2.500	Along 9.450 Length
D6101-017	7075-T7351 (QQ-A-250/12)	6.350	6.250	2.250	Along 6.350 Length

RELEASED
09/07/15/W

B	ADDED D6101-015/-017, ADD ASTM B209	RF	09.04.23
A	NEW ISSUE	CP	01.03.30
REV.	DESCRIPTION	BY	DATE
DESIGN	CP	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED	<i>[Signature]</i>	DRAWING NO.	REV. B
MFG. APPR.	<i>[Signature]</i>	D6101	SHEET 1 OF 1
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	SADDLE BILLET, 7075	NTS
DATE	09.04.23	COPYRIGHT © 2001 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

81-1001
16-1
C/W-7075



Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
Tel: 613 632 9577
Fax: 613 632 1053

PURCHASE ORDER

Purchase Order ID PO31052

Purchase Order Date 1/18/2016

PO Print Date 1/19/2016

Page Number 4 of 6

Order From :

VU-MET002

METAUX CASTLE
P.O. BOX 4090 STN A
TORONTO, ONTARIO M5W OE9
CANADA

Ship To : DART AEROSPACE LTD
1270 ABERDEEN
HAWKESBURY, ON K6A 1K7
CANADA

Contact Name
Vendor Phone

Buyer Chantal Lavoie
Customer POID
Customer Tax # 10127-2607
Terms Net 30
Currency USD
FOB Destination-Collect

Ship To Contact
Ship To Phone
Ship Via:
Ship Acct:

7	M303B1.000X1.000	303 BAR 1" X 1"	1/29/2016	12.00	\$15.13	\$181.56
			Yes	f		
			1/29/2016			

MATERIAL: AISI 303 SS BAR AS PER ASTM A582
NOTE: AISI 304/316 NOT ACCEPTABLE

SP/16-01-29

Line Total: \$181.56

8	M304B0.750X2.500	304 BAR .750 X 2.50	1/29/2016	12.00	\$18.50	\$222.00
			Yes	f		
			1/29/2016			

MATERIAL: AISI 304/316 SS BAR OR AISI 304/316 SS PLATE
AS PER ASTM A276 OR ASTM A240

NOTE: AISI 303 NOT ACCEPTABLE

SP/16-01-29

Line Total: \$222.00

9	D6101-005P	7075-T7351 8.25X5.0X2.5	1/29/2016	20.00	\$36.20	\$724.00
			Yes	Each		
			1/29/2016			

AS PER DWG.D6101 REV.B
B140767
SIZE: 5.00" X 8.250" X 2.50" THICK
GRAIN DIRECTION ALONG 5.00" LENGHT
MATERIAL: 7075-T7351 QQ-A-250/12
TOLERANCE AS PER QUOTE +.030"/-.000"

SP/16-02-03

Note:

1/19/2016

**Castle Metals®**

A. M. Castle & Co.

**PACKING SLIP/
CERTIFICATE OF CONFORMANCE**

Page 1 of 2

Shipment No:2870388

Ship From: A. M. CASTLE & CO. 2150 ARGENTIA ROAD MISSISSAUGA, ON L5N 2K7 CAN		Sold To: DART AEROSPACE LTD 1270 ABERDEEN HAWKESBURY, ON K6A 1K7 CA		Ship To: DART AEROSPACE LTD 1270 ABERDEEN HAWKESBURY, ON K6A 1K7 CAN		Deliver To: DART AEROSPACE LTD 1270 ABERDEEN HAWKESBURY, ON K6A 1K7 CA	
Date Shipped 02-FEB-16	F.O.B. ORIGIN	Freight Terms Prepaid		Carrier MANITOULIN		BOL No 2870388-2	

Shipment Details				Final Destination Branch - TOR			
Order No 4206943	Line No 10	Item No 752241.MO	Description 2.5000.PL.7075.T7351.ALUMINUM.USI.48.5000.144.5000 CUT 2SIDED TO 8.25 IN (+ .0310/- .0000 IN (GRAIN TO RUN ALONG 5")) X 5 IN (+ .0310/- .0000 IN (GRAIN TO RUN ALONG 5")) - ALUMINUM PLATE SAW SPECIFICATIONS: AMS-QQ-A-250/12				
Purchase Order No 31052		Part Number YOUR ITEM NUMBER: D6101-005		Ordered Qty 20.00 PCS		Invoice Qty 20.00 PCS	
Details		ALL PAPERWORK MUST FOLLOW ORDER / CUSTOMER MUST RECEIVE AT TIME OF DELIVERY ALL MATERIAL MUST HAVE IDENTIFYING MARKINGS EX:HEAT #'S Email P/s and certs to: clavoie@dartaero.com END USER: DART AEROSPACE END USE: COMMERCIAL AIRCRAFT PARTS					
Delivery No. 120322390	Mill	Heat Number 	Mech Id	PCS 20	Width (IN)	Length (IN)	Shipped Qty(LBS) 213.3121

These commodities/technologies are subject to US Export Administration & US State Dept. Regulations and, if intended for export, were/are exported thereunder. Diversion contrary to US Law is Prohibited.

We hereby certify the material covered by this certification conforms in accordance with the above specifications and has been found to meet the applicable requirements for the material, including any specifications forming a part of the description. Test reports are on file subject to examination. All claims for defective material are waived unless made in writing to A.M. Castle & Co. within 60 days of the shipment. Material cut to the correct size, or material cut by the customer cannot be returned.

These commodities, technology or software were exported from the United States in accordance with the Export Administration Regulations. Diversion contrary to US law prohibited.
Date Printed: 02-FEB-2016 04:58:47 PM



Castle Metals®

A. M. Castle & Co.

PACKING SLIP/
CERTIFICATE OF CONFORMANCE

Page 2 of 2

for credit.			
Reviewed by Authorized Castle Metals Representative:	<i>James H. V. Han</i>	Date:	Name:

FEB 02 2016



8/6-02-02

SHIP TO: A M CASTLE & CO 3050 SOUTH HYDRAULIC WICHITA, KS 67216
SOLD TO: AM CASTLE & CO- SOLD TO 1420 KENSINGTON RD SUITE 220 OAK BROOK, IL 60523

KAISER ALUMINUM

Trentwood Works - Spokane, WA 99215
Phone: (800) 367-2586

CERTIFIED TEST REPORT

Serial Number
4393427

CUSTOMER PO NUMBER: 340208	WORK PACKAGE:	CUSTOMER PART NUMBER: 752241	SHIP RUN/LOAD: 103354/19	GOV'T CONTRACT NUMBER:
KAISER ORDER NO: 1197054	LINE ITEM: 1	SHIP DATE: 12-OCT-2015	ALLOY: (7075)	CLAD: BARE
			TEMPER: (T7351)	PRODUCT DESCRIPTION: KaiserSelect Plate
WEIGHT SHIPPED: 3618 LB	QUANTITY: 2 PCS EST.	TRUCK B/L #: 2056425	GAUGE: (2.5000 IN) (63.5000 MM)	DIAMETER/WIDTH: 48.500 IN (1231.9 MM)
				LENGTH: 144.500 IN (3670.3 MM)

MHU 1937229: LOT 154070B7: 2 pieces;

Certified Specifications

DAS
14/10/2014
9-85

AMS 4078/RevJ
ASTM B 209/Rev14
BSS 7055/RevB
DPS 4.713/RevAK
MMS 159/RevT

AMS-QQ-A-250/12/RevA
ASTM B 594/Rev13
CMMP 025/RevU
GAMPS 9101/RevB/AmdSCN1
PS 21211/RevM

AMS-STD-2154/RevA
BAC 5439/RevJ
CSTI 006/RevE
GSS16100/RevG/Amd1

Test Code: 4297

Test Results

Lot: 154070B7 Cast 874 Drop 59 Ingot 2 Melted in USA

(ASTM E8/B557)
(EN 2002-1)

Tensile:	Temper	Dir / # Tests	Ultimate KSI (MPA)	Yield KSI (MPA)	Elongation %
	T7351	LT / 2 (Min:Max)	68.8 : 69.1 (474 : 476)	57.5 : 57.8 (396 : 399)	12.4 : 12.8

(ASTM E1004)
(EN 2004-1)
Conductivity %IACS : 41.0 Min 41.1 Max
(MS/M) : 23.8 Min 23.8 Max

(ASTM E1251)

Chemistry:	SI	FE	CU	MN	MG	CR	ZN	TI	V	ZR	OTHER
Actual(wt%)	0.06	0.14	1.4	0.08	2.4	0.19	5.9	0.02	0.01	0.02	TOT 0.05



KAISER ALUMINUM

Trentwood Works - Spokane, WA 99215
Phone: (800) 367-2586

CERTIFIED TEST REPORT

Serial Number
4393427

ALLOY LIMITS

	SI	FE	CU	MN	MG	CR	ZN	TI	V	ZR	OTHER	MAX
7075												
MIN(wt%)	0.00	0.00	1.2	0.00	2.1	0.18	5.1	0.00	0.00	0.00	EACH	0.05
MAX(wt%)	0.40	0.50	2.0	0.30	2.9	0.28	8.1	0.20	0.05	0.05	TOT	0.15

Aluminum Remainder

ORDER COMMENTS

AMC CA-154138 R 6
AMS 4078, AMS QQ-A-250/12, AMS STD-2154, A
STM B209, ASTM B594, BS
S 7055, CMMP 025, CSTI 006, DPS 4.713, GAMP
S 9101, MMS 159, PS 212

11

TEST NOTES

Metal represented by this test report was 100% immersion ultrasonically tested from one side with 3mm dead zones top and bottom and meets the Class A and Class B requirements of all specifications referenced on this test report. No surface marking of sonic indications is performed.

CERTIFICATION

Kaiser Aluminum Fabricated Products, LLC (Kaiser), is ISO-9001:2008/AS9100C certified and hereby certifies that all material shipped under this order:

- has been inspected, tested, and found to be in conformance with the requirements of the specifications indicated herein. For material thicknesses outside specification limits, mechanical properties are as shown herein and chemical composition meets specification requirements.
- was melted in the United States of America or a qualifying country per DFARS 225.872-1(a), was manufactured in the United States of America, and meets the requirements of DFARS 252.225 for domestic content.
- has been thermally processed in compliance with AMS 2772, where applicable.
- is mercury free, within the limits of detection of ASTM E1251 (≤ 1 ppm).
- is in compliance with RoHS 2, European Union Directive 2011/65/EU.
- is in compliance with and regularly monitors any updates to the European Chemical Agency, ECHA, REACH regulations, (EC) n°1907/2006.
- is free of Conflict Minerals, as defined in Section 15.2 of the Dodd-Frank Act.

Any warranty is limited to that shown on Kaiser Aluminum's standard general terms and conditions of sale. Test reports are on file, subject to examination. Test reports shall not be reproduced without the written approval of the Kaiser Aluminum laboratory. The recording of false, fictitious or fraudulent statements or entries on the certificate may be punished as a felony under federal law.

James Hemmenway

JAMES HEMENWAY, LABORATORIES SUPERVISOR



MATERIAL RECEIPT INSPECTION FORM

MATERIAL: D6101-005
 DATE: 16/02/04

PO / BATCH NO.: 31052/140767

MATERIAL CERT REC'D: yes
 QUANTITY RECEIVED: 20
 QUANTITY INSPECTED: 20
 QUANTITY REJECTED: _____

THICKNESS ORDERED: 5.00X8.250X2.50
 THICKNESS RECEIVED: 5.00X8.250X2.540
 SHEET SIZE ORDERED: _____
 SHEET SIZE RECEIVED: _____

DESCRIPTION	NCR (Check Y/N)		COMMENTS
SURFACE DAMAGE	Y	☒	
CORRECT FINISH	☒	N	
CORROSION	Y	☒	
CORRECT GRAIN DIRECTION	☒	N	
CORRECT MATERIAL	☒	N	
CORRECT THICKNESS	☒	N	
PHOTO REQUIRED	Y	☒	
CORRECT MATERIAL	☒	N	
CORRECT REF # TO LINK CERT	☒	N	
CORRECT MATERIAL IDENTIFICATION	☒	N	
CORRECT M# ON THE MATERIAL	☒	N	
DOES THIS MATERIAL REQUIRE ENGINEERING SIGN OFF	Y	☒	
DOES THIS REQUIRE AN EXTRUSION REPORT	Y	☒	

CUT SAMPLE PIECE OF MATERIAL AND PREFORM A HARDNESS CHECK. RECORD RESULTS BELOW					
TYPE OF MATERIAL SIZE OF TEST SAMPLE HARDNESS / DUROMETER READING	HRC	HRB	DUR A	DUR D	

testers located in the Quality Office

QC 18 INSPECTION	ENGINEERING SIGNOFF (if required)
INSPECTED BY: <u>14</u> <u>9-89</u> DATE: <u>16/02/04</u>	SIGNED OFF BY: _____ DATE: _____

Attach this inspection sheet with the corresponding material cert and remit to be scanned and received in

MATERIAL RECEIPT INSPECTION FORM

INSTRUCTIONS FOR INSPECTING BAR, TUBING, ROUND, & SHEET STOCK

- 1- VERIFY STOCK TO DART PURCHASE ORDER
- 2- MEASURE ALL DIMENSIONS FOR EACH PURCHASED STOCK
 - a. WIDTH, THICKNESS, DIAMETER, WALL THICKNESS & LENGTH
- 3- VERIFY CONDITION OF MATERIAL i.e. DAMAGED, CORRODED, etc.
- 4- VERIFY THAT SUPPLIER HAS A NUMBER (HEAT #) ON ITS RECEIVING REPORT TO LINK TO MATERIAL CERTS
- 5- VERIFY MATERIAL CERTS ARE CORRECT TO THE DART PO INSTRUCTIONS
- 6- REMOVE / CUT A PIECE OF MATERIAL FOR SAMPLE HARDNESS TESTING

INSTRUCTIONS FOR INSPECTING SKIDTUBE & STEP EXTRUSION

- 1- VERIFY TO DART SUPPLIED DRAWING
- 2- SAMPLE INSPECT MATERIAL IN BUNDLE TO ENSURE MATERIAL CAN BE RECEIVED INTO DART
- 3- USING PORTABLE HARDNESS TESTER VERIFY HARDNESS OF THE MATERIAL TO THE DRAWING
- 4- VERIFY THAT MATERIAL CERTS MATCH TO WHATS CALLED UP ON THE DART DRAWING

AFTER MATERIAL PASSES INSPECTION

- 5- HAVE DART EMPLOYEES START STOCKING MATERIAL BUT REQUEST MIN 20pcs FOR FULL INSPECTION
- 6- INSPECT ALL DIMS AS PER DRAWING REQUIREMENTS

INSTRUCTIONS FOR INSPECTING CROSS TUBE MATERIAL

- 1- VERIFY MATERIAL CERTS MATCH THE REQUIREMENTS ON THE DART DRAWINGS
- 2- INSPECT MIN. HALF THE BATCH OF EXTRUSION RECEIVED INTO DART
- 3- INSPECT MATERIAL AS PER THE EXTRUSION REPORT
 - a. WALL THICKNESS USING ULTRA-SONIC IN 4 LOCATIONS
 - b. OUTSIDE DIAMETER HIGHEST/LOWEST BOTH ENDS
 - c. INSIDE DIAMETER HIGHEST/LOWEST BOTH ENDS
 - d. STRAIGHTNESS @ CENTER OVER 12" SPAN
 - e. WALL THICKNESS USING TUBE MICROMETER HIGHEST/LOWEST BOTH ENDS
- 4- IDENTIFY EACH TUBE IN SEQUENCE OF INSPECTING (TUBE 1, TUBE2.....) AND W/O# AND PO#
- 5- RECORD ALL FINDINGS ON EXTRUSION REPORT

IF ANY QUESTIONS PLEASE SEE QC COORDINATOR BEFORE GOING FURTHER